






Output flange

Dout = 465
B.C. = 425
Bolts = 16xØ25
Dreces = 320h7
h recess = 8

Se det. 1

Possible flex. coupling
Vulastik-L 2811/4010

Possible PTO

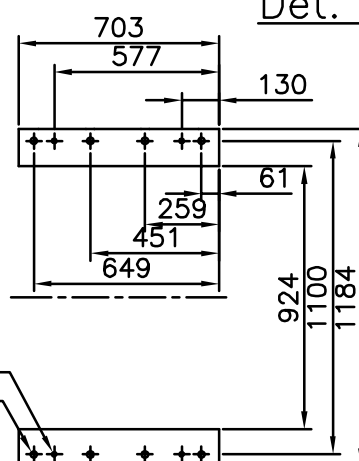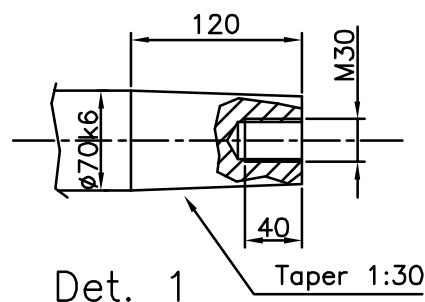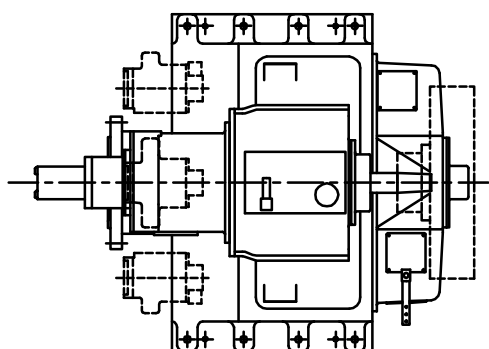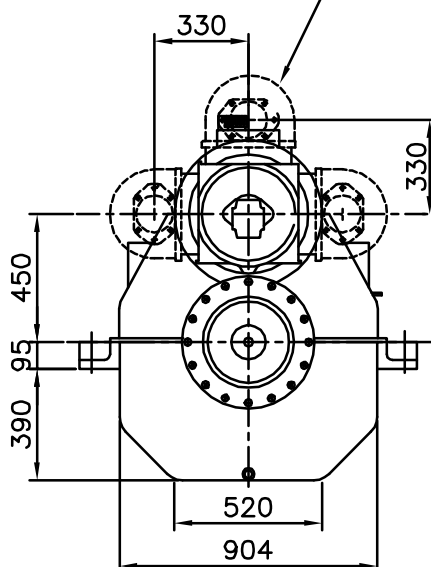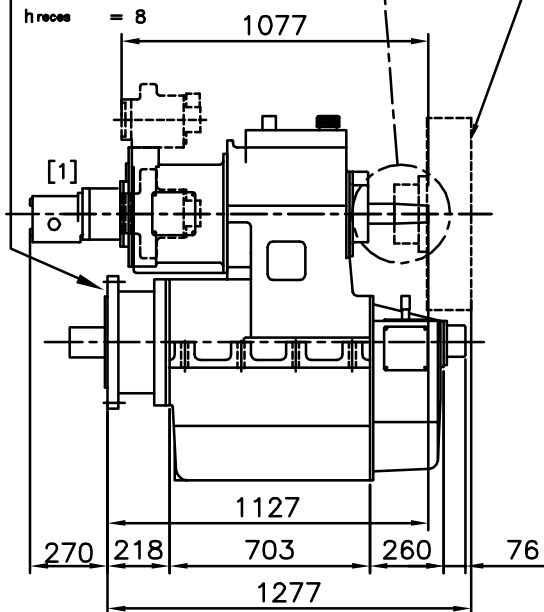


4xM16
8xØ24

Footprint

PRELIMINARY

Do not scale
Subject to confirmation

Dette dokument må ikke uden
vor tilladelse kopieres eller
forevises tredje person.
Es ist verboten, diese Zeichnung
ohne unsere Erlaubnis zu kopieren,
oder irgend jemanden Unbefugten zu
zeigen.
This drawing must not without our
permission be copied or shown
to anybody not concerned.

mekanord a.s	Weight.(Kg.)	General tolerances DS ISO 2768-m
	Material: —	
	Scale: 1:25	Drawn: AP
		Date: 180892
Description: Dim. sketch		Drg. No.: 4—04247
Type: GEAR 450/70HS		